





### Outline: 产品概要

- Use ferrite core, high frequency.  
铁氧体磁芯，工作频率高。
- Low DC resistance, high saturation current.  
低直流电阻，高饱和电流。
- Lead free product, RoHS compliant.  
无铅产品，符合 RoHS 指令。
- Widely used in switching power supply, power amplifier, output antenna, filter, displayer, UPS, and etc.  
广泛应用于开关电源，功率放大器，输出天线，滤波器，显示器，不间断电源等。
- Operating temperature :  $-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$   
(Including coil's temperature rise)  
工作温度： $-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$  (包含线圈发热)

### 1 Appearance and dimensions (mm) 外形尺寸

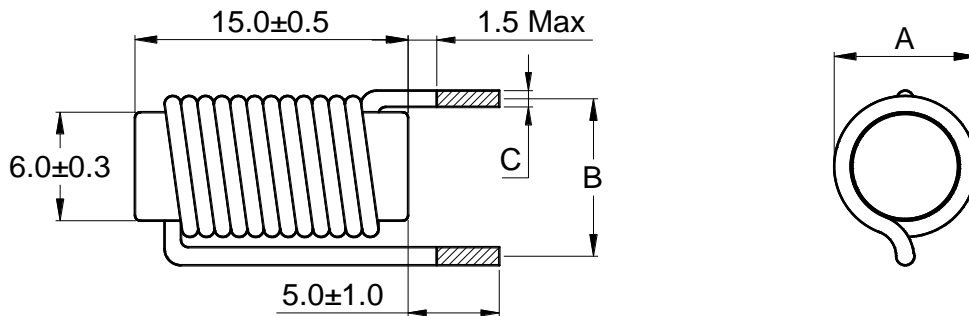

### 2 Schematic 原理图



Part No. 品名	A	B	C
	Max	$\pm 1.0$	$\pm 0.15$
RKR0615-1R0M	9.60	11.50	1.50
RKR0615-1R8M	8.80	10.00	1.10
RKR0615-2R2M	8.80	10.00	1.10
RKR0615-3R3M	8.50	9.20	0.90
RKR0615-4R7M	8.00	8.50	0.70
RKR0615-5R0M	8.00	8.50	0.70
RKR0615-6R8M	7.80	8.20	0.60
RKR0615-8R2M	7.80	8.20	0.60
RKR0615-100M	7.60	8.00	0.50
RKR0615-150M	7.40	7.50	0.40
RKR0615-220M	7.20	7.00	0.30

**3 Electrical characteristics  
电气特性**

Part No. 品名	Inductance (μH) 电感值 ※1 ±20%	D.C.R. (mΩ) 直流电阻		Saturation current (A) 饱和电流 ※2 Typical	Temperature rise current (A) 温升电流 ※3 Typical
		Typical	Max		
RKR0615-1R0M	1.00	1.71	2.23	24.0	31.5
RKR0615-1R8M	1.80	3.85	5.01	23.0	21.0
RKR0615-2R2M	2.20	5.30	6.90	21.0	17.9
RKR0615-3R3M	3.30	8.40	10.9	19.0	14.2
RKR0615-4R7M	4.70	16.4	21.3	15.5	10.2
RKR0615-5R0M	5.00	17.2	22.4	15.0	9.90
RKR0615-6R8M	6.80	24.8	32.2	14.0	8.30
RKR0615-8R2M	8.20	30.6	39.8	12.5	7.45
RKR0615-100M	10.0	46.0	59.8	11.0	6.00
RKR0615-150M	15.0	84.0	109	9.00	4.50
RKR0615-220M	22.0	134	174	7.50	3.55

■ All data is tested based on 25°C ambient temperature.  
所有数据基于环境温度 25°C条件下测试。

※1 Inductance measure condition at 1kHz, 0.25V.  
电感测试条件为 1kHz, 0.25V。

※2 Saturation current: the actual value of DC current when the inductance decrease 20% of its initial value.  
饱和电流: 电感值下降其初始值的 20%时所加载的实际直流电流值。

※3 Temperature rise current: the actual value of DC current when the temperature rise is ΔT40°C(Ta=25°C).  
温升电流: 使产品温度上升到 ΔT40°C时所加载的实际直流电流值(Ta=25°C)。

※ Special remind: Circuit design, component placement, PWB size and thickness, cooling system and etc. all will affect the product temperature. Please verify the product temperature in the final application.  
特别提醒: 线路设计, 组件布局, 印刷电路板(PWB)尺寸及厚度, 散热系统等均会影响产品温度。  
请务必在最终应用时, 验证产品发热状况。

**4 Saturation current VS temperature rise current curve  
饱和电流 VS 温升电流曲线**

