

MD-0710S-TS-B


产品特性 Features

- 采用PP塑料、空芯线圈注塑成型。PPplastic with air coil to be molded.
- 带外壳保护，可防止辐射和干扰。Shield cover protect, avoid shield and disturb.
- 电感值可以调整。Adjustable inductance value.
- 结构牢固，可以从上下两端任意调整。Firm structure, coil core can be tuned by upside or downside.
- 频率范围：30MHz~250MHz。Frequency range: 30MHz~250MHz.
- 温度系数：150±100PPM/°C。Temperature coefficient: 150±100PPM/°C.
- 无铅产品，符合RoHS、REACH指令。Lead free, RoHS & REACH compliant.

产品应用 Applications

- RF调频、无线收发、安防领域。RF radio, wireless transceiver, security field.
- 无线电调频、TV接收器、发射装置。FM radio, TV receiver, transceiver.
- 汽车、无线通信、射频振荡电路应用。Car, wireless telecommunication and RF electronic application.

外形尺寸 Shape and Dimensions(unit:mm)

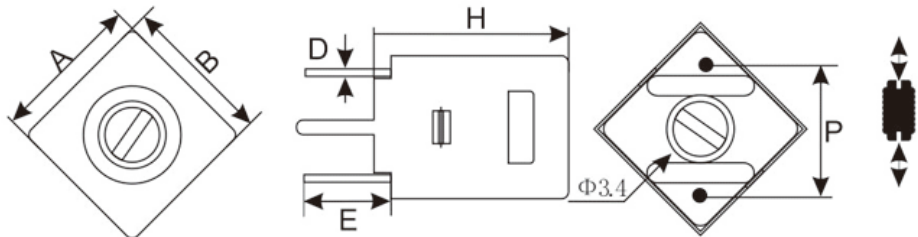

A	B	H	D	E	P
8.1Max	8.1Max	11.7Max	0.5 ± 0.1	5.0 ± 1.0	6.2 ± 0.5

电气性能 Electrical Characteristics

产品编号 Part No.	颜色 Colour	中心电感值 L(Nom) (nH)	最小电感值 L(Min) (nH)	最大电感值 L(Max) (nH)	Q值 (Min)	测试频率 Test Freq MHz
MD-0710S-1.5TS-B	White(白)	19.0	17.8	20.2	60	100
MD-0710S-2.5TS-B	Red(红)	27.0	23.3	30.7	60	100
MD-0710S-3.5TS-B	Orange(橙)	43.1	38.4	47.8	60	100
MD-0710S-4.5TS-B	Yellow(黄)	56.0	50.8	61.2	60	100
MD-0710S-5.5TS-B	Green(绿)	71.0	65.5	76.5	60	100
MD-0710S-6.5TS-B	Blue(蓝)	86.5	82.5	90.5	50	50

测试仪器 Testing Instrument: Q-METER171, Inductance-HP4191A

- 模压线圈的塑胶颜色可根据客户的要求生产。Tailor-made colour are welcome with molded coils.
- 同一型号模压线圈，如果需要增加电感值，可选用铁氧体磁芯。Ferrite core used can increase inductance value in the same item.